


ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

REVISIONS		DOC. NO.	SPC-F005	Effective:	12/21/08	DCP No:	860	
DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
430	A	RELEASED	JWM	1/22/01	JC	1/24/01	DJC	1/24/01

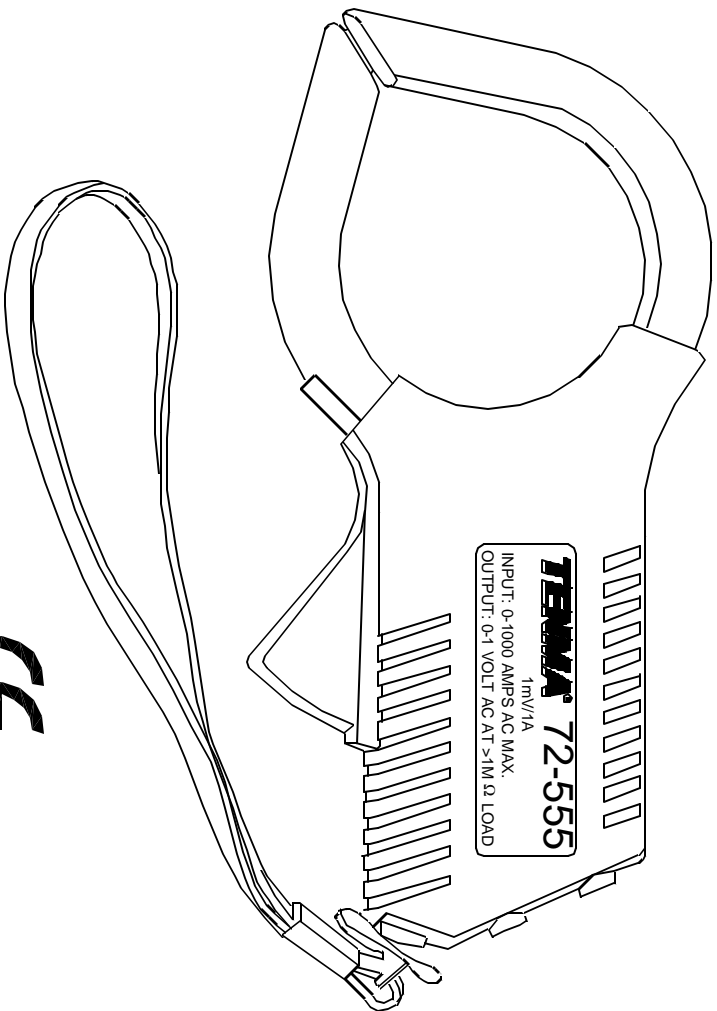

Specifications

- 54mm jaw opening
- Input: 0~1000A AC Max.
- Output: 0~1 VAC RMS with >1 Megohm meters
- Resolution: 1mV / 1A
- Accuracy: (50Hz~60Hz)
 - 0~800A - ±2.5 %Rdg ± 4 dgts
 - 800~1000A - ±3.0 %Rdg ±4 dgts
- Operating Temp: 0°C ~ 50°C
- Storage Temp: -20°C ~ 60°C
- Dimensions: 7.25" x 3.4" x 1"
- Weight: 7 oz.
- Output Jacks: Standard Banana Type
- Includes 24" test leads and manual
- Dimensions: 3 1/2" x 7 1/4" x 1"
- One year limited warranty

DISCLAIMER
 ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

DRAWN BY:	DATE:
Jeff McVicker	1/22/01
CHECKED BY:	DATE:
JOHN COLE	1/24/01
APPROVED BY:	DATE:
Daniel Carey	1/24/01

TENMA[®]

DRAWING TITLE:

AC Clamp Adaptor

SIZE	DWG. NO.	ELECTRONIC FILE	REV
A	72-555	66F3573.dwg	A
SCALE:	NTS	U.O.M.: INCHES [mm]	SHEET: 1 OF 1