


ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

REVISIONS			DOC. NO. SPC-F004 * Effective: 12/21/98 * DCP No: 680					
DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
190	A	RELEASED	D.J.C.	8/17/98	JC	10/16/98	JWM	10/26/98
1255	B	UPDATED SPECIFICATIONS	HYO	10/9/01	JC	11/26/01	JC	11/26/01

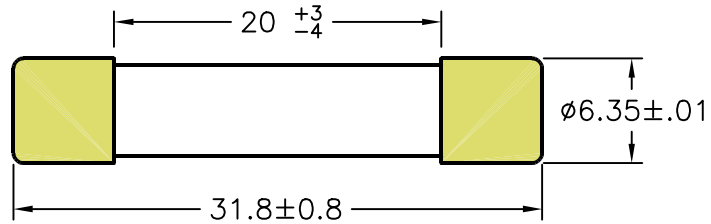

FEATURES:

1. Voltage Rating: 250 VAC
2. Glass Tube construction.
3. Standards: UL/CSA 248 part 14.

MULTICOMP TYPE NO.	RATED CURRENT - I _N (A)	VOLTAGE RATING (V)	NOMINAL RESISTANCE COLD (ohms)	NOMINAL MELTING - I ² T (A ² sec)	BREAKING CAPACITY
MCFO1G-250MA	0.250	250	2.00	0.0355	10000 A @ 125 VAC 35 A @ 250 VAC
MCFO1G-300MA	0.300	250	1.40	0.0689	
MCFO1G-375MA	0.375	250	0.820	0.185	
MCFO1G-500MA	0.500	250	0.495	0.483	
MCFO1G-750MA	0.750	250	0.243	1.84	
MCFO1G-1A	1 A	250	0.189	0.760	
MCFO1G-1.25A	1.25	250	0.138	1.45	10000 A @ 125 VAC 100 A @ 250 VAC
MCFO1G-1.6A	1.6	250	0.0930	2.80	
MCFO1G-2A	2	250	0.0700	5.20	
MCFO1G-2.5A	2.5	250	0.0510	9.54	
MCFO1G-3A	3	250	0.0424	14.0	
MCFO1G-4A	4	250	0.0291	28.5	10000 A @ 125 VAC 200 A @ 250 VAC
MCFO1G-5A	5	250	0.0223	50.0	
MCFO1G-6A	6	250	0.0177	81.1	
MCFO1G-8A	8	250	0.0121	166.0	
MCFO1G-10A	10*	250	0.00925	298.0	

* Note: Not CSA


SPC-F004.DWG

DISCLAIMER:
ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

multicomp

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.	DRAWN BY:	DATE:	DRAWING TITLE:			
	DANIEL CAREY	8/17/98	3AG FAST - ACTING FUSES			
	CHECKED BY:	DATE:	SIZE	DWG. NO.	ELECTRONIC FILE	REV
	JOHN COLE	10/16/98	A	TA-139	TA-139.DWG	B
	APPROVED BY:	DATE:	SCALE: NTS		U.O.M.: MILLIMETERS	SHEET: 1 OF 2
	JEFF MCVICKER	10/26/98				

Average Time Current Curves

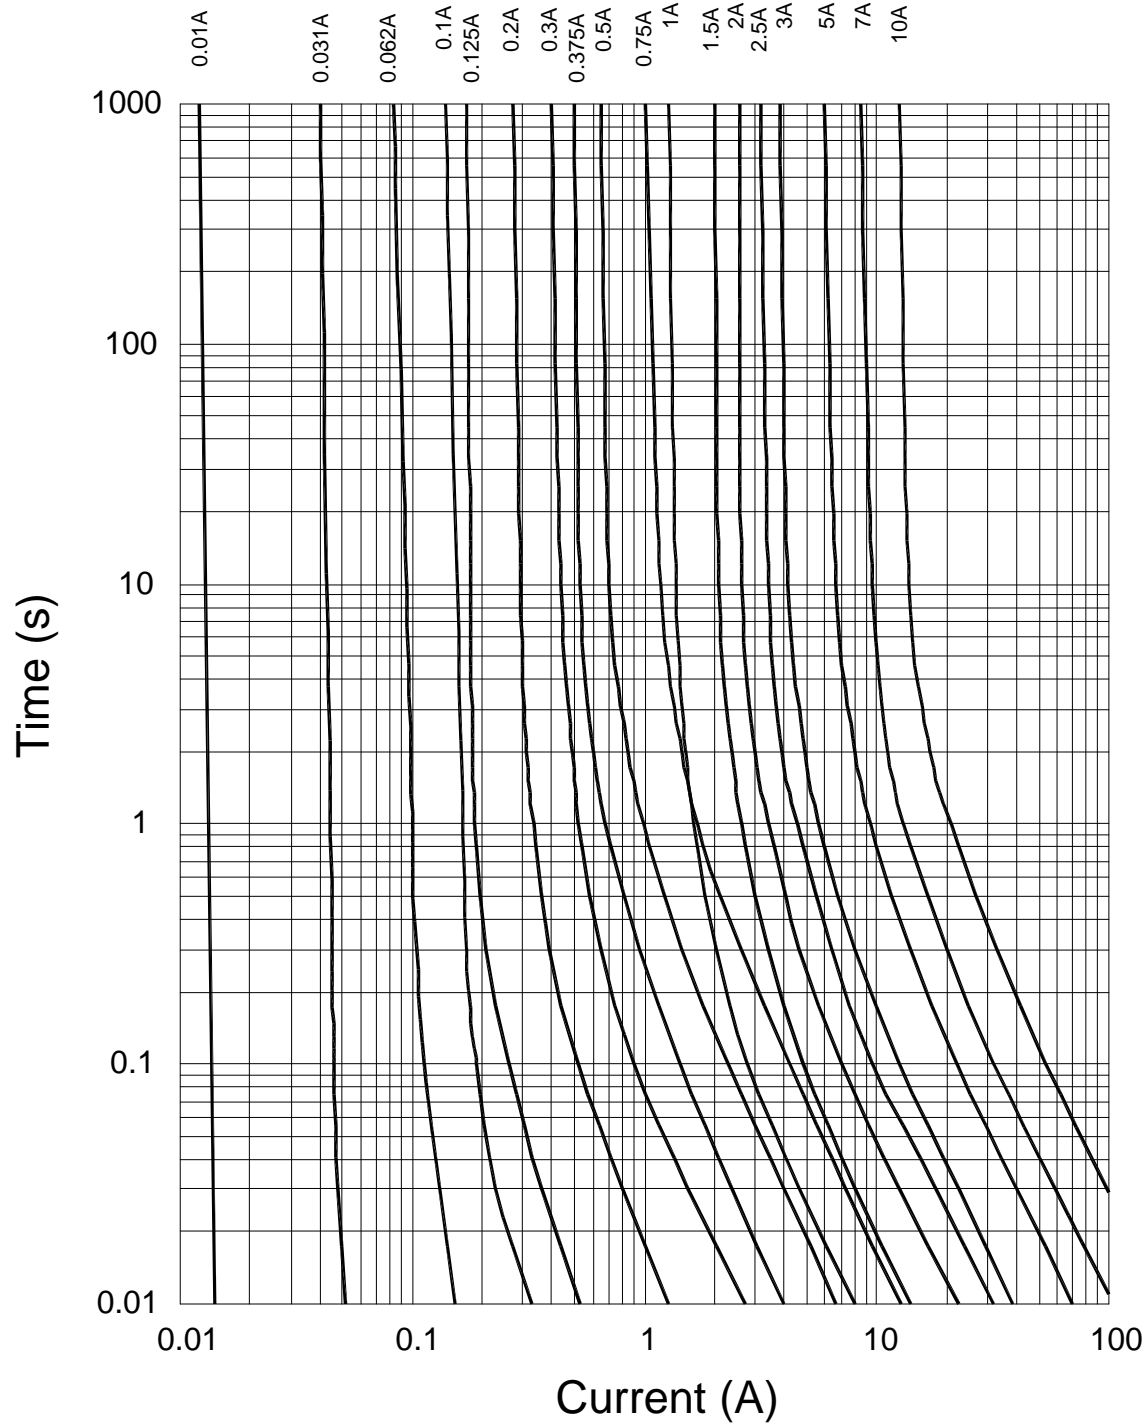

ELECTRICAL CHARACTERISTICS

% OF AMPERE RATING	OPENING TIME
110%	4 HOURS, MIN
135%	1 HOUR, MAX
200%	5 SECONDS, MIN

SIZE A	DWG. NO. TA-139	ELECTRONIC FILE TA-139.DWG	REV B
SCALE: NTS		U.O.M.: MILLIMETERS	SHEET: 2 OF 2