


ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

P = POLES

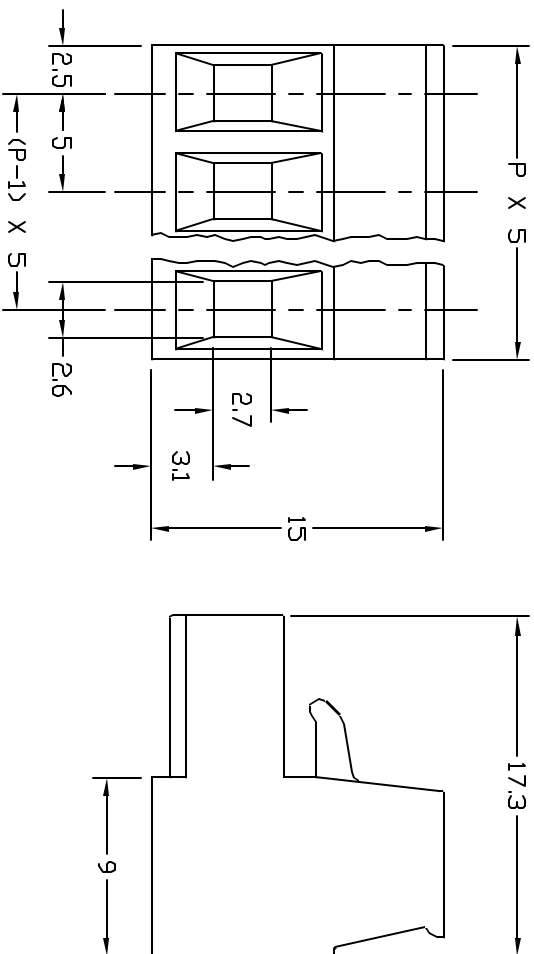

REVISIONS		DOC. NO.	SPC-FD05	Effective	12/21/88	Doc No.	480	
DOP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
154	A	RELEASED	HYD	3/8/00	JC	4/5/00	DJC	4/29/00

SPC TYPE NO.	NO. OF POLES
1811	2
1812	3
3332	4
1814	5
3333	6
3334	8
1817	10
3335	12
3336	16
3337	20

- SPECIFICATIONS:**  
**DESCRIPTION:**  
 1. 5 MILLIMETERS SPACING

- RATINGS:**  
 1. VOLTAGE: 250V  
 2. CURRENT: 15A  
 3. WIRE SIZE: 22-12 AWG

- MATERIALS:**  
 1. INSULATING MATERIAL: PA  
 2. FLAMMABILITY CLASS: UL94V-0  
 3. TEMPERATURE RANGE: -30 °C to +105 °C  
 4. WIRE CAGE: CuZn  
 5. CONTACT: CuSn  
 6. COLOR: GREEN

**DISCLAIMER**  
 ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL OBTAIN THE SERVICES OF THE PRODUCT FOR THE INTENDED USE AND ASSURE ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

DRAWN BY:	DATE:
HISHAM ODISH	3/8/00
CHECKED BY:	DATE:
JOHN COLE	4/5/00
APPROVED BY:	DATE:
DANIEL CAREY	4/28/00



**SPC TECHNOLOGY**

DRAWING TITLE:  
**HORIZONTAL PLUG, CAGE CLAMP, TERMINAL BLOCK**

SIZE	DWG. NO.	ELECTRONIC FILE	REV
A	TA-220	TA-220.DWG	A
SCALE:	NTS	U.O.M.: MILLIMETERS	SHEET: 1 OF 1